

OCPP Certification Program Document 2

OCPP 1.6 Test Procedure & Test Plans

2024-08-15

V1.3.0



Contents

1.	Introd	uction	4
2.	Terms	and definitions	4
3.	Refere	ences	4
4.	Test o	verview	5
4.1	Test	coverage	5
4.2	Test	prerequisites	5
5.	Test p	rocedure and Responsibilities	6
5.1	Cert	ification Documents & Support	6
5.2	Test	Instrumentation & Test Plan	6
5.3	Test	Procedures	6
5.4	Pass	Criteria	6
5.5	Rete	esting	6
5.6	Issue	e handling	7
6.	Test S	etup	8
6.1	Gen	eral setup	8
6.2	Test	laboratory tools10	0
7.	Confor	mance test plan10	0
7.1	Intro	oduction10	0
7.	.1.1	Objective10	0
7.	.1.2	Scope of tests	0
7.	.1.3	Acceptant and acceptance criteria	1
7.	.1.4	Optional functionalities within feature profiles	1
7.2	Con	formance tests1	1
7.	.2.1	Test basis for OCPP 1.6	1
7.	.2.2	Test approach	1
7.3	Test	script1	3
8.	Perfor	mance measurements14	4
8.1	Intro	oduction1	4
8.	.1.1	Objective1	4
8.	.1.2	Scope of tests	4
8.	.1.3	Acceptant and acceptance criteria1	4
8.2	Perf	ormance measurements14	4
8.	.2.1	Test basis	4
8.	.2.2	Test approach	5



8.2.	.3	Intake DUT	. 16
8.2.	.4	Entry and exit criteria	. 16
8.3	Tes	t script	. 16
Apper	ndix /	A: Protocol Implementation Conformance Statement	. 17
A.1	PICS	SOCPP 1.6 certificate	. 20
A.2	PICS	S OCPP 1.6 security certificate	. 24
A.4	PICS	S for OCPP 1.6 performance measurement	. 27
Apper	ndix I	3: Test tools	. 28
Apper	ndix (C: List of conformance tests	. 29
OCPP	1.6 ((Full & Subset)	. 29
OCPP	1.6 9	Security	. 38
Apper	ndix I	D: Conformance tests - OCTT Test Rules	. 40
Δnner	ndix I	Fr Example FVs to use for testing	40



1. Introduction

This document describes the test procedure and the test plans of the OCPP Certification Program for OCPP 1.6.

The test procedure covers testing of:

- a Charging Station (incl. product subtypes)
- a Charging Station Management System (CSMS)

_

2. Terms and definitions

Term / abbreviation	Definition / description	
Certification Profile	A set of OCPP functionalities developed by the OCA to target the needs of a specific business driver accredited by the Alliance.	
Charging Station	Refers to a Charge Point (OCPP 1.6 terminology) or Charging Station (OCPP 2.0 terminology)	
CSMS	Central System (OCPP1.6 terminology) or Charging Station Management System (OCPP2.0 terminology)	
Device	An OCPP based device eligible for OCPP certification. In this document, this refers to a Central System or a Charge Point.	
DUT	Device Under Test: The device submitted by the vendor for OCPP certification.	
OCA	Open Charge Alliance	
Participants	Any company involved in the OCPP certification program.	
PICS	Protocol Implementation Conformance Statement. The completed PICS document is provided by the vendor to the Test Laboratory, asserting which OCPP specific requirements are met by its device.	
Test Laboratory	An independent test laboratory authorized by the Open Charge Alliance to administer the approved OCPP tests and to assess eligibility of devices for OCPP certification.	
Vendor	A manufacturer / developer submitting devices for certification.	

3. References

No	Title
1	OCPP Certification Procedure



4. Test overview

4.1 Test coverage

To become OCPP certified, the tested Device Under Test (DUT), has to successfully pass the following parts:

- Conformance tests: the tested DUT is tested against the OCPP Compliance Testing Tool. The tool has built in validations that should not fail during certification tests. With these validations the Tool verifies whether the DUT has implemented the OCPP specification correctly. The optional features of the OCPP protocol are also covered by the certification, if supported by the DUT. The set of optional features is listed in appendix C.
- Performance measurements: a number of performance values of the tested DUT are measured and give an idea how the device behaves in a lab environment. The performance parameters are stated by the vendor in the Protocol Implementation Conformance Statement (PICS).

4.2 Test prerequisites

The following prerequisites are applicable for certification testing:

- A Protocol Implementation Conformance Statement (PICS) has to be completed by the vendor of a DUT when submitting a solution for OCPP certification (See Appendix A: Protocol Implementation Conformance Statement). This should include all relevant limits and non-OCPP settings that are relevant for the test laboratory and for the correct functioning of the Charging Station / CSMS.
- As a part of the certification process, the test lab will verify the PICS and in case of a Charging Station, all configuration keys will be read, validated where applicable and added to the test report.
- For CSMS:
 - The vendor shall supply either a running copy of a CSMS on a server / laptop to the test laboratory or give the test laboratory access to a running copy of the CSMS on a separate environment that is accessible via the Internet (e.g. a cloud environment). In the latter case, an Internet connection from the test laboratory to the CSMS shall be made available. This environment shall be "handed over" to the test laboratory and not updated by the vendor without knowledge of the test laboratory.
- For Charging Station:
 - A network connection to the Charging Station should be available via a telecom connection or wired ethernet connection.
 - To be able to test actual transactions, an EV is needed or has to be simulated. In the current EV market multiple types of sockets exist and no affordable EV simulators for all types of sockets are available at the time of writing. If an EVSE tester is available, this can be used (e.g. a type 2 socket to regular household socket with a dummy device (e.g. heater)). If no EV test socket or other test device is available at the testlab for a socket type, an EV is used. Testing a product subtype Mode 1/2-only Charging Station always requires using an EV instead of an EVSE tester. Please refer to Appendix E for examples of EVs that could be used per socket type.
- A technical representative of the Vendor is allowed to participate to the tests. If not physically present, a remote support from the technical team of the vendor



must be arranged between the vendor and the test laboratory to help solving any issue raised during the certification tests.

- A Charging Station that supports more than 1 security profile, has to be delivered with the lowest supported security level. During certification it will be upgraded.
- To successfully execute the mandatory conformance test cases, the prerequisites for these tests have to be met.

5. Test procedure and Responsibilities

5.1 Certification Documents & Support

Test plans, configuration guides and engineering support are made available by the Test Laboratory to vendors in all stages of a vendor's preparation for certification. The responsibility for the test plans lies with the Open Charge Alliance.

5.2 Test Instrumentation & Test Plan

The Test Laboratory will distribute information to vendors regarding the test instruments that will be used during the certification tests if requested.

5.3 Test Procedures

Testers of the test laboratory will execute all tests and test procedures adhering strictly to the OCPP tests plans. Engineering staff from vendor companies may be present. Their presence may be required to resolve issues that may arise in the course of testing.

5.4 Pass Criteria

To be certified a vendor must successfully pass all tests described in chapter 4 and as defined in the OCPP test plans for the CSMS or Charging Station submitted for certification.

In exceptional cases (e.g. in case of bugs in OCPP Compliance Testing Tool) the OCA Compliance Working group can decide that a vendor is certified despite not passing all tests according to the test plans.

5.5 Retesting

Testers of the test laboratory will execute all tests and test procedures that are applicable for the Protocol Implementation Conformance Statement (PICS) that is reported by the vendor prior to the certification. If one or more tests fail, this will be reported back to the vendor and no certificate will be awarded (yet).



The policy for re-testing for the certification testing by the test laboratories is described below.

- Certificates are only valid for the device tested by the test laboratories and apply for a specific hardware feature set and a specific OCPP software version;
- Any change on the device (hardware feature set or OCPP software version) during the course of testing is not allowed and will require a full re-test of the DUT by the test laboratory;
- If a device "crashes" and requires a reset during conformance testing, this is considered as failing the conformance tests (and thus certification) and will thus require a re-test of the certification laboratory. This excludes crashes or problems caused by improper handling of the device by the test laboratory.

In case of un-clarity regarding the re-testing procedure, only the CWG of the Open Charge Alliance is authorized to decide on the procedure to be followed and this is not to be discussed between the Test Laboratory and the vendor.

5.6 Issue handling

Handling issues during tests can be separated in the following types:

- Configuration / setup issues. These are solved during testing, if necessary with the help of the technical representative of the vendor. When during the testing of a device a non-OCPP configuration is changed, all certification tests should be started over again;
- Bugs in software / hardware. This is considered as failing the certifications tests. See also 5.5 for handling of this situation.



6. Test Setup

6.1 General setup

The test setup used for Conformance testing is similar to the setup for the performance measurements. In order to have a fair comparison the connection properties are measured as part of the test. The test setups for testing are displayed in Figure 1 to Figure 3.

In Figure 1 the setup for a CSMS with a fixed ethernet connection is displayed. The CSMS is connected to the internet as well as the machine running the OCPP Compliance Testing Tool. Before starting the actual tests, the bandwidth as well as the latency for the network connection are measured. Please refer to the next paragraph for more information on the Test laboratory connection tester.

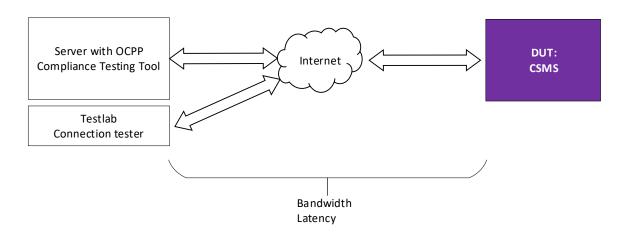


Figure 1: CSMS with fixed ethernet connection

In Figure 2 the setup for a Charging Station with a fixed ethernet connection is displayed. The Charging Station is connected via a UTP cable to the Charging Station. To be able to test actual transactions, actual EVs, EV test sockets or other test devices are used. In the current EV market multiple types of sockets exist and no affordable EV simulators for all types of sockets are available at the time of writing. For this reason, if no EV test socket or other test device is available at the testlab, an EV is to be used (e.g. rented). Testing a product subtype Mode 1/2-only Charging Station always requires using an EV instead of an EVSE tester. In case of Mode 2 charging, an in-cable control- and protection device, i.e. an IEC 61851 PWM controller, is used to connect the Charging Station to the EV. Please refer to Appendix E for examples of EVs to use per socket type.






Figure 2: Charging Station with fixed ethernet connection

In Figure 3 the setup for a Charging Station with a telecom-only connection is displayed. The Charging Station is connected via mobile network to the OCPP Compliance Testing Tool. To be able to test bandwidth, 2 SIM cards (same network operator) are used: 1 for the Charging Station under test and 1 for testing the mobile internet connection at that location, with a Testlab Connection tester. The SIM cards will be provided by the test labs.

To be able to test actual transaction, test sockets / test devices are used (see explanation above).

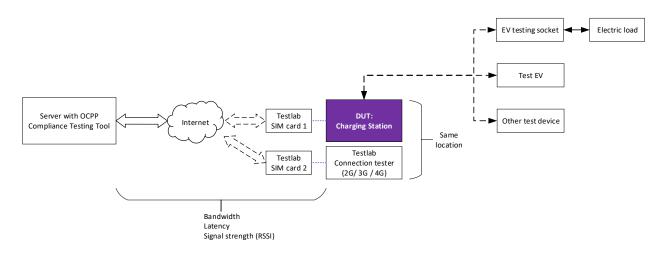


Figure 3: Charging Station with (only) telecom connection

For the tests where the DUT is a Charging Station, the OCA will provide test RFID cards that can be used in combination with the OCPP Compliance Testing Tool.



6.2 Test laboratory tools

The Test laboratory will use the following test tools:

- EVSE tester plug for AC type 1
- EVSE tester plug for AC type 2
- EV simulator / test socket for DC charging (tbd)
- Mobile communication dongle that supports enabling and disabling 2G, 3G and 4G
- OCPP Compliance Testing Tool (OCTT)
- Test laboratory connection tester

Test laboratory connection tester

The test laboratory shall use a "connection tester", which refers to hardware / software that can measure:

- the internet connection from the server with OCPP Compliance Testing Tool to the CSMS under test. This will be done by executing an online internet speed test on both the CSMS as well as the machine running the OCPP Compliance Testing Tool.
- the properties of the internet connection (2G and / or 3G and / or 4G) from the server with OCPP Compliance Testing Tool to the location of the Charging Station under test.

This can for example be done by using a mobile communication dongle and a laptop. This dongle must support enabling and disabling 2G, 3G and 4G. For each type, an online internet speed test will be executed, to determine the bandwidth / latency. For determining the signal strength, separate software could in this setup be used to determine the signal strength (actual results depends on the dongle used, but it is merely to get an indication of the signal strength).

For uniformity, the same device is to be used for this by all labs. Please refer to Appendix B for the exact device that will be used.

7. Conformance test plan

7.1 Introduction

This chapter describes the conformance test plan for vendors to successfully complete as part of the OCPP certification program.

7.1.1 Objective

The objective of the conformance tests is to verify and validate the correct implementation of the OCPP protocol of a Charging Station or CSMS.

7.1.2 Scope of tests

The scope of the conformance tests is to verify and validate the correct implementation of the OCPP protocol of a Charging Station or CSMS by testing the DUT against the OCPP Compliance Testing Tool (OCTT) which automatically validates the responses by the DUT. Furthermore, the basic functionalities that are a consequence of messages in the OCPP protocol of a Charging Station or CSMS are verified and validated during these OCTT tests.



These tests are done by doing manual checks while running scenarios from the OCPP Compliance Testing Tool.

7.1.3 Acceptant and acceptance criteria

The Test Laboratory that executes the conformance test is not responsible for accepting or rejecting an OCPP implementation, but only responsible for executing the conformance test and reporting the results to the vendor and OCA.

The acceptance criteria for the conformance test is that all mandatory and applicable conditional tests for certification are executed successfully.

7.1.4 Optional functionalities within feature profiles

OCPP holds some optional Charging Station functionalities within the enclosed environment of a feature profile. These functionalities are managed by Read-only / Optional Configuration Keys. A issued certificate contains the following information:

- Whether the optional configuration keys are implemented or not.
- What value the implemented "Read-only" configuration keys contain.
- Description of the functionalities belonging to the configuration keys.

7.2 Conformance tests

7.2.1 Test basis for OCPP 1.6

The basis for testing conformance is the OCPP 1.6 edition 2 specification (date: 2017-09-28), OCPP 1.6 Errata sheet v4.0 Release (date: 2019-10-23) and OCPP 1.6 security whitepaper edition 3 (date: 2022-02-17)

Additionally, the following documentation is used:

• the scenarios for conformance testing are documented in Appendix C: List of conformance tests. This list contains the list of mandatory and conditional scenarios from the OCPP Compliance Testing Tool.

7.2.2 Test approach

The approach of testing is to test the DUT using the OCPP Compliance Testing Tool, manual functional verifications are executed during these conformance tests. Between tests, a utility test case (000_RESET) from the OCPP Compliance Testing Tool is used (and must pass) to set the Charging Station to a basic idle state to prevent test cases influencing each other.

The overall test process consists of the following steps:

- The Internet connection properties are measured.
- Test scenarios are started automatically using the OCPP Compliance Testing Tool.
- Most messages are automatically exchanged.
- Manual actions are executed by a test laboratory tester.
- Manual / on screen validations are executed by a test laboratory tester.



Intake DUT

As part of the conformance test, the following intake is done:

- A short pre-test is done to show that the DUT is functioning and is not, for example, damaged during transport.
- As an input the vendor should indicate whether or not the DUT supports sending milliseconds in OCPP messages.

Entry and exit criteria

Entry criteria for executing conformance test:

- All prerequisites that are documented in the OCPP Certification Procedure shall be met.
- All prerequisites that are documented in the OCPP Certification Test Procedure shall be met.
- Sufficient documentation about the DUT is available to the test laboratory in order to execute the manual actions for the test scenarios.

Exit criteria for executing conformance test:

• All mandatory test scenarios from Appendix C shall be executed successfully.



7.3 Test script

The actions that are executed for the conformance tests are the following:

Preparation:

- 1. A running instance of the OCPP Compliancy Testing Tool is provided to the test laboratory (once)
- 2. The OCPP Compliancy Testing Tool UI is opened in a browser
- 3. The tester chooses the system that is tested
- 4. The information from the PICS is uploaded in the OCTT
- 5. The remaining configuration is entered in the OCTT
- 6. The test configuration is (automatically) added to the "OCPP Certification Report".
- 7. For Charging Station, it is required that testcase 019 is executed for the core profile. It will retrieve all implemented configuration variables.

Execution will be done for each test. The list of test cases that needs to be performed based on the PICS, is pre-filtered for the test lab. For each test the following steps are performed:

- 1. If testing a Charging Station:
 - a. The charging station is returned to basic state of operations using the OCTT restore mechanism (must be executed *successfully* before continuing)
- 2. If a transaction is running, the OCTT attempts to stop the transaction.
- 3. The test case is started in the OCTT. The Id and name used in the test tool user interface can be found in Appendix C and the separate OCPP 1.6 Test Cases document for more details and, if applicable, the conditions for this test case.
- 4. The steps in the scenario details in the OCPP 1.6 Test Cases document and the instructions given by the tool user interface are followed. Tool validations are done automatically.
- 5. After finishing the test case in the OCTT: based on the outcome of the test (PASS / FAIL / INCONC) and the OCTT test rules (see Appendix B), the result of the scenario is determined.

The Test Report is updated accordingly and can be exported after the certification run. A test report is generated including the OCTT configuration used.



8. Performance measurements

8.1 Introduction

This chapter describes the performance measurements that are performed by the test laboratory as part of the OCPP certification program.

8.1.1 Objective

The objectives of the Performance measurements are to measure the performance of a DUT within a lab context and to provide these as additional information to the certificate. The purpose of the Performance measurement is to measure the performance parameters that are stated by a vendor in the Protocol Implementation Conformance Statement (PICS).

8.1.2 Scope of tests

The scope of the performance measurement is to measure a number of performance parameters that are stated by a vendor in the Protocol Implementation Conformance Statement (PICS). For the example template for a PICS related to performance, please refer to Appendix A.4. The values that are stated by the vendor in the PICS do not have to fall within a set of upper / lower boundaries for certification, but will only be included in the test report to provide information to buyers of a device. These performance parameters are listed in paragraph 8.2.1.

8.1.3 Acceptant and acceptance criteria

The Test Laboratory that executes the performance measurement is not responsible for accepting or rejecting an OCPP implementation, but only responsible for executing the performance measurement and reporting the results to the vendor and OCA.

The only acceptance criterium for the performance measurement is that all parameters from the PICS are measured.

8.2 Performance measurements

8.2.1 Test basis

OCPP 1.6

The basis for the measurements is the OCPP 1.6 edition 2 specification (date: 2017-09-28), OCPP 1.6 Errata sheet v4.0 Release (date: 2019-10-23) and OCPP 1.6 security whitepaper edition 3 (date: 2022-02-17).



The following list of performance parameters is used:

Name	Description	
OCPP triggered function timeout	The timeout used for when waiting for an OCPP function with its corresponding request message (e.g. time between receiving ChangeAvailability.conf and StatusNotification.req). Messages to the DUT can be handled within this timeout. This value excludes firmware, diagnostics and rebooting (e.g. based on a reset)	
OCPP response timeout	The timeout used for when waiting for an OCPP response message. Messages to the DUT can be handled within this timeout.	
Response time Authorize	The response time for the Authorize message.	
Transaction authorization time by RemoteStartTransaction	The time between the RemoteStartTransaction.req message and the corresponding StartTransaction.req. Only cases where the RemoteStartTransaction immediately results in an authorization followed by a StartTransaction.req are included.	
Transaction authorization end time by RemoteStopTransaction	The time between the RemoteStopTransaction.req message and the corresponding StopTransaction.req. Only cases where the RemoteStopTransaction immediately results in an end of the authorization followed by a StopTransaction.req are included.	

8.2.2 Test approach

Performance measurements will be done in the following way: for measuring message timeouts the OCPP Compliance Testing Tool for OCPP is used. This tool logs all messaging. Based on this logging, the response times are determined.

As introduced in chapter 6, the tests are executed in a predefined test setup. Especially for performance measurements, this setup is important to get accurate measurements. Furthermore; it is important to measure performance in detail, without including effects that are out of control of a DUT.

In case of the OCPP protocol the main bottleneck is the network connection between the Charging Station and the CSMS. For this reason a number of parameters related to bandwidth is measured in (and by) the test laboratory before and during the measurement when a mobile connection is used. This is done using a mobile communication dongle connected to a laptop at the same location. This is (of course) only an indication to make sure that the mobile communication network is available at that location.

The following table lists the parameters that are measured concerning the network connection:

Parameter	Unit	Minimum / maximum for test setup*
Bandwidth	kB per second	Minimum: 5 kB per second
Latency	ms	Maximum: 1000 ms
Signal strength (RSSI) if applicable	dBm	Minimum: -81 dBm (CSQ 16)

^{*} If these values are not met, the test lab should change the setup to improve the connection, before executing the measurement.



Please note: only 1 communication technology is measured for performance, so if multiple technologies available in a Charging Station, the technology that has to be used for the measurements must be stated in the PICS for performance.

8.2.3 Intake DUT

As part of the performance measurement, the following intake is done:

- Connectivity between the OCPP Compliance Testing Tool to the DUT is setup and measured (bandwidth, latency, RSSI).
- If not done during previous tests, a short pre-test is done to show that the DUT is functioning and is not, for example, damaged during transport.

8.2.4 Entry and exit criteria

Entry criteria for executing performance measurements:

- All prerequisites that are documented in the OCPP Certification Procedure shall be met
- All prerequisites that are documented in the OCPP Certification Test Procedure shall be met.
- Sufficient documentation about the DUT is available to the test laboratory in order to execute the manual actions for the test scenarios.

Exit criteria for executing performance measurements:

• All performance criteria that are listed in 8.2.1 shall be measured.

8.3 Test script

The actions that are executed for the performance measurements are the following:

Preparation for a Charging Station:

- The Charging Station that is tested, must be configured in the OCPP Compliance Testing Tool.
- 2. The network parameters as described in paragraph 8.2.2 are measured. In case of a poor network connection, it is attempted to optimize the connection so that it does not influence the performance measurements results.

Preparation for a CSMS:

- 1. The CSMS must be configured in the OCPP Compliance Testing Tool.
- 2. The network parameters as described in paragraph 8.2.2 are measured. In case of a poor network connection, it is attempted to optimize the connection so that it does not influence the performance measurements results.



For the timeout values, the OCPP Compliance Testing Tool logs are used to determine the measured values. The Test Report is updated accordingly.

Appendix A: Protocol Implementation Conformance Statement

There are three PICS:

- 1. PICS for OCPP1.6
- 2. PICS for OCPP1.6 Security
- 3. PICS for OCPP1.6 Performance Measurement

General information about DUT

The following table should list the general information about the DUT:

Vendor name	<>
DUT	CSMS / Charging Station
Product subtype	N.A. / Mode 1/2-only Charging Station
Type / model (for CS only)	<type and="" model="" name="" number="" or=""></type>
Socket(s) / connector(s) (for CS only)	Singe / multiple
Fixed cable (for CS only)	<yes no=""></yes>
OCPP Software version	<version></version>
Support for milliseconds in OCPP messages	Yes / No
Communication technology	WiFi / ethernet / mobile network
RFID readers	none / single /one per EVSE

Optional features

The following table should list the presence / absence of some optional features:

	Feature	Supported / present
C-02	Support for allowing Offline Authorization for Unknown Ids (AllowOfflineTxForUnknownId)	Yes / No
C-03	Support for maximizing energy for invalid ids (MaxEnergyOnInvalidId)	Yes / No
C-04	Authorization Cache	Yes / No
C-05	Support to limit StatusNotifications (MinimumStatusDuration)	Yes / No
		If supported by a
		Charging Station, the
		station is to be
		delivered to the test



		lab with the value set to 0.
C-06	Authorization status after cable disconnected on EV side (StopTxOnEVSideDisconnect)	Yes / No / Both
C-07	Support for local start	Yes / No
C-08	Support for local stop	Yes / No
R-1	Support reservations of entire Charging Station	Yes / No
SC-1	Supported charging rate units (ChargingScheduleChargingRateUnit)	A / W / Both

Additional questions:

ld	Additional questions for lab testing	Supported / present
AQ-1	Can the last CentralSystemRootCertificate can be removed?	Yes / No
AQ-2	Does the Charging Station have a cable lock, which prevents the EV driver to connect the EV and EVSE before authorization?	Yes / No
AQ-3	Can the last ChargePointCertificate be removed (via other means than OCPP)?	Yes / No
AQ-4	Is your Charging Station able to download firmware while there is an ongoing transaction?	Yes / No
AQ-5	Does your Charging Station enforce a selection of EVSE (by design) prior to authorization?	Yes / No
AQ-6	Does your Charging Station support charging an EV using IEC 61851-1 (Mode 3)?	Yes / No
AQ-7	Reporting of StopTransaction after power loss	
AQ-7.1	Charge Point configured to report StopTransaction(s) before going down.	Yes / No
AQ-7.2	Charge Point configured to report StopTransaction(s) after going down and being back online again.	Yes / No

Other relevant settings and limits

The table below should contain all relevant limits and non-OCPP settings that are relevant for the test laboratory and for the correct functioning of the Charging Station / CSMS:

Limit / setting	Value	
GetConfigurationMaxKeys	•••	
MeterValuesAlignedDataMaxLength	•••	
MeterValuesSampledDataMaxLength	•••	
Minimum MeterValueSampleInterval supported	•••	
Maximum MeterValueSampleInterval supported	•••	
Minimum HeartbeatInterval supported	•••	
Maximum HeartbeatInterval supported	•••	
StopTransactionMaxMeterValues	•••	

Page **18** from **40**



StopTxnAlignedDataMaxLength	•••
StopTxnSampledDataMaxLength	•••
WebSocketPingInterval	•••
Local Authorization List	
LocalAuthListMaxLength	
SendLocalListMaxLength	•••
Smart charging	
ChargeProfileMaxStackLevel	•••
ChargingScheduleAllowedChargingRateUnit	t>
ChargingScheduleMaxPeriods	•••
Firmware Management	
Supported file transfer protocols	{http, https, ftp, ftps}
Other relevant values	
<other minimum="" value=""></other>	
<other maximum="" value=""></other>	

IP configuration

The test laboratory will provide information on the network configuration that has to be configured on the Charging Station beforehand.



A.1 PICS OCPP 1.6 certificate

The Table below states the mandatory and optional functionalities for certification. When a functionality is supported by the DUT, all applicable use cases must be supported, unless stated otherwise.

Name	OCPP 1.6	OCPP 1.6	Description		
Name	Fully	Subset	Description		
	supported	supported			
Core	Yes	Yes	Basic Charging Station functionality for booting, authorization (incl. cache if available), configuration, transactions, remote control.		
Included functionalities					
	Cold Boot Charg				
	Cold Boot Charge				
	Cold Boot Charge				
	Start Charging S				
		Session - Plugin F			
	Regular Charging Session - Identification First				
	Regular Charging Session - Identification First - ConnectionTimeOut				
	Stop Charging Session				
	Stop transaction - IdTag in StopTransaction matches				
	IdTag in StartTransaction				
		 ParentIdTag in S dTag in StartTrans 			
	EV Side Disconne				
	One Reader for	Multiple Connecto	ors		
	One Reader for A	Multiple Connector	rs (optional)		
	Cache (if availat	ole)			
	Regular Start Cha	arging Session - Ca	ched Id		
	Clear Authorizati	ion Data in Author	ization Cache		
	Transaction Rela System	ted Message not A	ccepted by Central		
		emote actions Hap	ppy Flow		
	Remote Start Cha	arging Session - Ca	ble Plugged in First		
	Remote Start Cha	arging Session - Re	emote Start First		
	Remote Start Cha	arging Session - co	nnection timeout		
	Remote Stop Cha	rging Session			
	Core Profile - Re	esetting Happy Flo	ow		
	Hard Reset Witho				
	Soft Reset Witho				
	Hard Reset With				
	Soft Reset With Transaction				



metaded junetionation	Firmware Management Firmware Update - Download and Install					
Included functionalities			update management and diagnostic log file download.			
Firmware Management	Yes	Yes / No	Support for (remote) firmware			
	Data Transfer to	a Central System				
	Data Transfer to					
	DataTransfer					
	Configuration ke		,			
		onfiguration Keys	Non-Happy Flow			
	Offline Transacti					
	Offline Stop Tran					
	Offline Start Trai	During Transaction				
		fline behavior No				
		th Unavailable Sta				
	Power failure boot charging point-configured to stop transaction(s)					
	Core Profile - Power Failure Non-Happy Flow					
	Unlock Connector - Unknown Connector					
	Unlock Connector - Unlock Failure					
	Core Profile - Unlocking Non-happy Flow					
	Remote Stop Transaction - Rejected					
	Core Profile - Remote Actions Non-Happy Flow Remote Start Charging Session - Rejected					
		<mark>prization List - Not</mark> Prsion - NotSupport				
		ession Lock Failure				
	expired	ossion Lock Failure				
	Start Charging Se		nvalid / blocked /			
		sic Actions Non-h	appy Flow			
	Clock-aligned Me					
	Sampled Meter V	'alues				
	Change/set Conf Meter values	iguration				
	•	configuration key	(CSMS only)			
		iguration keys (CS/				
	Retrieve configuration (Charging Station only)					
	Core Profile - Configuration Happy Flow					
	Unlock Connector - With Charging Session					
	cable)					
	cable)	Cable) Unlock connector - no charging session running(Fixed				
	Unlock connector - no charging session running(Not fixed					
	Core Profile - Ur	nlocking Happy Flo	DW .			



Firmware Update - Download Failed						
	Firmware Update - Installation Failed					
	Diagnostics					
	Get Diagnostics					
	Get Diagnostics - Upload Failed					
Smart Charging	Yes	Yes / No (Not applicable for product subtype Mode 1/2-only Charging Station.)	Support for Smart Charging (all profile types, including stacking), to control charging.			
Included functionalities		,				
,	Central Smart Charging					
		arging - TxDefault	Profile			
		arging - TxProfile				
		arging - No ongoin	g transaction			
		arging - Wrong tra				
			Profile - with ongoing			
	transaction					
	Get Composite Schedule					
	Clear Charging Profile					
	Stacking Charging	g Profiles				
	Remote Start Transaction with Charging Profile					
	Remote Start Transaction with Charging Profile					
	Remote Start Transaction with Charging Profile - Rejected					
Reservation	Yes	Yes / No	Support for			
Reservation	res	res / No	reservation of a connector of a Charging Station.			
Included functionalities						
	Reservation of a	Connector				
	Reservation of a	Connector - Local	start transaction			
			te start transaction			
		Connector - Expire				
		Connector - Occup				
		Connector - Unava				
		Connector - Rejec	ted			
	Reservation of a					
		Charge Point - Tra				
		Charge Point - Occ	•			
		Charge Point - Una	available			
	Cancel Reservati					
	Cancel Reservation					
	Cancel Reservation		+ I dT			
	use a reserved Co	onnector with par	encialag			



Local Authorization List Management	Yes	Yes / No	Features to manage a local list in the charging station containing authorization data for whitelisting users.		
Included functionalities					
	Get Local List V	ersion			
	Get Local List Ve	ersion (empty)			
	Send Local Auth	orization List			
	Send Local Autho	orization List			
	Send Local Autho	orization List - Ver	sionMismatch		
	Send Local Autho	orization List - Fail	ed		
	Send Local Autho	orization List - Full			
	Send Local Autho	orization List - Diff	erential		
	Regular Start Charging Session - Id in Local Authorization List				
Remote Trigger	Yes	Yes / No	Support for remotely triggering messages that originate from a Charging Station. This can be used for resending messages or for getting the latest information from the Charging Station.		
Included functionalities					
	Trigger Message				
	Trigger Message - Rejected				



A.2 PICS OCPP 1.6 security certificate

Security extension (based on whitepaper, JSON only).

Supported cipher suites (Charging Station only)¹

Cipher suite	Supported
TLS_ECDHE_ECDSA_WITH_AES_128_GCM_SHA256	Yes / No
AND TLS_ECDHE_ECDSA_WITH_AES_256_GCM_SHA384	
125_265112_2655A_W111_A25_250_66M_511A561	
TLS_RSA_WITH_AES_128_GCM_SHA256	Yes / No
AND	
TLS_RSA_WITH_AES_256_GCM_SHA384	

Optional features for Security Certificate

Name	Implemented	Description			
Security Profile 1	Yes / No	Unsecured Transport with Basic Authentication Profile 1 is optional			
	Secure connection setup				
	Update Charge Point	Password for HTTP Basic Authentication			
	Security event/loggi	ng			
	Get Security Log				
	Secure firmware up				
	Secure Firmware Upo				
	Secure Firmware Upo	date - Invalid Signature			
Security Profile 2	Yes / No	TLS (1.2 or higher) with Basic Authentication Security profile 2 or security profile 3 or both must be implemented			
	Secure connection setup				
	Update Charge Point Password for HTTP Basic Authentication				
	Install a certificate o	on the Charge Point			
	-	tificate from the Charge Point			
	Security event/loggi	ing			
	-	nCertificate Security Event			
	Get Security Log				
	Secure firmware up				
	Secure Firmware Update				
	Secure Firmware Upo	date - Invalid Signature			
Security Profile 3	Yes / No	TLS (1.2 or higher) with Client Side Certificates Security profile 2 or security profile 3 or both must be implemented			

¹ Please note that the CSMS SHALL support at least the following four cipher suites: TLS_ECDHE_ECDSA_WITH_AES_128_GCM_SHA256, TLS_ECDHE_ECDSA_WITH_AES_256_GCM_SHA384, TLS_RSA_WITH_AES_128_GCM_SHA256, TLS_RSA_WITH_AES_256_GCM_SHA384



Secure connection setup
Update Charge Point Certificate by request of Central System
Install a certificate on the Charge Point
Delete a specific certificate from the Charge Point
Security event/logging
Invalid ChargePointCertificate Security Event
Invalid CentralSystemCertificate Security Event
Get Security Log
Secure firmware update
Secure Firmware Update
Secure Firmware Update - Invalid Signature

Besides filling the above table, the vendor must also supply (examples of) the public certificates that will be used during the tests, in order to prepare the tests at the test lab.





A.4 PICS for OCPP 1.6 performance measurement

Name	Value	Unit	Description
OCPP triggered function timeout (Charging Station only)	XX	seconds	The response time for when waiting for an OCPP function with its corresponding request message. (Firmware update, Diagnostics and Reboot are excluded from this measurement.) Message combinations checked: CancelReservation / StatusNotification(status=Available) ReserveNow / StatusNotification(status=Reserved) ChangeAvailability / StatusNotification TriggerMessage / <triggered message=""></triggered>
OCPP response timeout	XX	seconds	The response time for when waiting for an OCPP response message.
Response time Authorize (CSMS only)	XX	seconds	The response time for the Authorize message.
Transaction authorization time by RemoteStartTransaction (Charging Station only)	XX	seconds	The time between the RemoteStartTransaction.req message and the corresponding StartTransaction.req. Only cases where the RemoteStartTransaction immediately results in an authorization followed by a StartTransaction.req are included.
Transaction authorization end time by RemoteStopTransaction (Charging Station only)	XX	Seconds	The time between the RemoteStopTransaction.req message and the corresponding StopTransaction.req. Only cases where the RemoteStopTransaction immediately results in an end of the authorization followed by a StopTransaction.req are included.

The communication technology for which the measurements are done:

Communication technology	<wifi ethernet="" mobile=""></wifi>
--------------------------	-------------------------------------

Please note: only 1 communication technology is measured for performance, so if multiple technologies available in a Charging Station, please select for which the measurements should be executed by the lab.



Appendix B: Test tools

The following tools are used during the certification tests:

- OCPP Compliance Testing Tool. This test tool is supplied to the Testing Laboratory and maintained by the Open Charge Alliance.
- Mobile communication dongle for performance measurements
 - o Brand: Huawei
 - Type: E3372h LTE dongle
 - EV emulator for AC / DC Type 1/2 provided by OCA:
 - Brand / Type: Trialog / EVComboCS4M
 - Some labs use their own EV emulator for AC / DC Type 1/2, one of the following:
 - Brand / Type: Keysight / Charge Discovery system
 - Brand / Type: Comemso / EVCA-system



Appendix C: List of conformance tests

OCPP 1.6 (Full & Subset)

M = Mandatory

O = Optional

C = Conditional (condition in the "Remark" column)

No	OCTT Id	OCPP Compliance Testing Tool scenario	Conf. Test for Charging Station	Conf. test for Central System	Remark
			CORE		
		Cold Boot Charge Point			
1	TC_001	Cold Boot Charge Point	M	М	
2	TC_002	Cold Boot Charge Point - Pending	M		
		Start Charging Session			
4	TC_003	Regular Charging Session - Plugin First	С	М	Only applicable for a Charge Point which supports local start/stop transaction and does not have a cable lock (AQ-2).
5	TC_004_1	Regular Charging Session - Identification First	С	М	Only applicable for a Charge Point which supports local start/stop transaction.



6	TC_004_2	Regular Charging Session - Identification First - ConnectionTimeOut	С	M	Only applicable for a Charge Point which supports local start transaction.
		Stop Charging Session			
7	TC_068	Stop transaction - IdTag in StopTransaction matches IdTag in StartTransaction	С		Only applicable for a Charge Point which supports local start/stop transaction.
8	TC_069	Stop transaction - ParentIdTag in StopTransaction matches ParentIdTag in StartTransaction	С		Only applicable for a Charge Point which supports local start/stop transaction.
9	TC_005_1	EV Side Disconnected - StopTransactionOnEVSideDisconnect = true - UnlockConnectorOnEVSideDisconnect = true	С	М	StopTransactionOnEVSideDisconnect = true, Condition: The Charge Point does not have a fixed cable on Charge Point side AND The configuration key StopTransactionOnEVSideDisconnect does NOT have the accessibility ReadOnly in combination with value false. Not applicable for product subtype Mode 1/2-only Charging Station.
10	TC_005_2	EV Side Disconnected - StopTransactionOnEVSideDisconnect = true - UnlockConnectorOnEVSideDisconnect = false	С		StopTransactionOnEVSideDisconnect = true, Condition: The configuration key StopTransactionOnEVSideDisconnect does NOT have the accessibility ReadOnly in combination with value false. Mandatory for product subtype Mode 1/2-only Charging Station.
11	TC_005_3	EV Side Disconnected - StopTransactionOnEVSideDisconnect = false - UnlockConnectorOnEVSideDisconnect = false	С		StopTransactionOnEVSideDisconnect = false, Not applicable for product subtype Mode 1/2-only Charging Station.

Page **30** from **40**



		Cache			
13	TC_007	Regular Start Charging Session - Cached Id	С	М	Only applicable if a cache is available.
14	TC_061	Clear Authorization Data in Authorization Cache	С	М	Only applicable for a Charge Point which supports local start/stop transaction AND if a cache is available.
		Core Profile - Remote actions Happy flow			
16	TC_010	Remote Start Charging Session - Cable Plugged in First	С	M	Only applicable for a Charge Point that does not have a cable lock (AQ-2)
17	TC_011_1	Remote Start Charging Session - Remote Start First	М	М	
18	TC_011_2	Remote Start Charging Session - Time Out	M	М	
19	TC_012	Remote Stop Charging Session	M	М	
		Core Profile - Resetting Happy Flow			
20	TC_013	Hard Reset Without transaction	M	M	
21	TC_014	Soft Reset Without Transaction	M	M	
22	TC_015	Hard Reset With Transaction	М		
23	TC_016	Soft Reset With Transaction	М		
		Core Profile - Unlocking Happy flow			
24	TC_017_1	Unlock connector - no charging session running (Not fixed cable)	С	М	Only applicable for a Charge Point with a detachable cable. Not applicable for product subtype Mode 1/2-only Charging Station.
25	TC_017_2	Unlock connector - no charging session running (Fixed cable)	С	М	Only applicable for a Charge Point with a fixed cable. Mandatory for product subtype Mode 1/2-only Charging Station.
26	TC_018_1	Unlock Connector - With Charging Session (Not fixed cable)	С		Only applicable for a Charge Point with a detachable cable. Not applicable for product subtype Mode 1/2-only Charging Station.



27	TC_018_2	Unlock Connector - With Charging Session (Fixed cable)	С		Only applicable for a Charge Point with a fixed cable. Mandatory for product subtype Mode 1/2-only Charging Station.
		Core Profile - Configuration Happy flow			
28	TC_019	Retrieve configuration	M		
29	TC_019_1	Retrieve all configuration keys		М	
30	TC_019_2	Retrieve specific configuration key		М	
31	TC_021	Change/set Configuration	M	М	
		Meter values			
32	TC_070	Sampled Meter Values	M		
33	TC_071	Clock-aligned Meter Values	M		
		Core Profile - Basic Actions Non-happy flow			
34	TC_023	Start Charging Session - Authorize invalid	M		
35	TC_023_1	Start Charging Session - Authorize invalid		М	
36	TC_023_2	Start Charging Session - Authorize expired		М	
37	TC_023_3	Start Charging Session - Authorize blocked		М	
38	TC_024	Start Charging Session - Lock Failure	0	М	Only applicable if the Charge Point does not have a fixed cable on Charge Point side.
62	TC_043_1	Send Local Authorization List - NotSupported	С	0	If not supported by Charging Station.
59	TC_042_1	Get Local List Version (not supported)	С	0	If not supported by Charging Station.
		Core Profile - Remote Actions Non-Happy Flow			
39	TC_026	Remote Start Charging Session - Rejected	M	М	
41	TC_028	Remote Stop Transaction - Rejected	M	0	
		Core Profile - Unlocking Non-happy flow			
42	TC_030	Unlock Connector - Unlock Failure	0	М	
43	TC_031	Unlock Connector - Unknown Connector	М	0	



		Core Profile - Power Failure Non-Happy Flow			
44	TC_032_1	Power failure boot charging point - configured to stop transaction(s) before going down	С	М	Only applicable for a Charge Point configured to stop transaction(s) before going down.
45	TC_032_2	Power failure boot charging point-configured to stop transaction(s)	С		Only applicable for a Charge Point configured to stop transaction(s) after going down and being back online again.
46	TC_034	Power Failure with Unavailable Status	M		
		Core Profile - Offline behavior Non-Happy Flow			
48	TC_036	Connection Loss During Transaction	M		
49	TC_037_1	Offline Start Transaction - Valid IdTag	С	М	Only applicable for a Charge Point which supports local start/stop transaction and at least one of the following 3 functionalities: local authorization list feature profile, Unknown Offline Authorization or Authorization Cache. Using valid idTag, AllowOfflineTxForUnknownId = true, LocalAuthorizeOffline = true
50	TC_037_2	Offline Start Transaction - Invalid IdTag - StopTransactionOnInvalidId = false	C		Only applicable for a Charge Point which supports local start/stop transaction and at least one of the following 3 functionalities: local authorization list feature profile, Unknown Offline Authorization or Authorization Cache. Using invalid idTag, AllowOfflineTxForUnknownId = true, LocalAuthorizeOffline = true, StopTransactionOnInvalidId = false Please note: as with all Charging Stations, this test case is also applicable for product subtype Mode 1/2-only Charging Station (depending on the above conditions).



51	TC_037_3	Offline Start Transaction - Invalid IdTag - StopTransactionOnInvalidId = true	С	М	Only applicable for a Charge Point which supports local start/stop transaction and at least one of the following 3 functionalities: local authorization list feature profile, Unknown Offline Authorization or Authorization Cache. Using invalid idTag, AllowOfflineTxForUnknownId = true, LocalAuthorizeOffline = true, StopTransactionOnInvalidId = true
52	TC_038	Offline Stop Transaction	С		Only applicable for a Charge Point which supports local stop transaction.
53	TC_039	Offline Transaction	С	М	Only applicable for a Charge Point which supports local start/stop transaction and at least one of the following 3 functionalities: local authorization list feature profile, Unknown Offline Authorization or Authorization Cache.
		Core Profile - Configuration Keys Non- Happy Flow			
54	TC_040_1	Configuration keys - NotSupported	М	0	Not supported configuration key.
55	TC_040_2	Configuration Keys - Invalid value	M	0	Incorrect value.
		DataTransfer			
57	TC_062	Data Transfer to a Charge Point	М		Only verifying that the DUT responds (rejecting is ok).
58	TC_064	Data Transfer to a Central System		М	Only verifying that the DUT responds (rejecting is ok).
		Local Authoriz	zation Lis	t Manag	ement
		Get Local List Version			
60	TC_042_2	Get Local List Version (empty)	M	М	
		Send Local Authorization List			
61	TC_043	Send Local Authorization List	M		Prerequisite: support for at least 5 idTokens is required.
63	TC_043_2	Send Local Authorization List - VersionMismatch	М		
64	TC_043_3	Send Local Authorization List - Failed	0	M	



65	TC_043_4	Send Local Authorization List - Full		М	
66	TC_043_5	Send Local Authorization List - Differential		М	
67	TC_008	Regular Start Charging Session - Id in Local Authorization List	М		
		Firmw	areManag	ement	
		Firmware Management			
68	TC_044_1	Firmware Update - Download and Install	М	М	For interop: check FTP connection Please note that when going for a Charging Station Security Certification, this test case should fail (as per security requirements).
69	TC_044_2	Firmware Update - Download Failed	M	М	Please note that when going for Security Certification, this test case is not tested.
70	TC_044_3	Firmware Update - Installation Failed	M	М	Please note that when going for Security Certification, this test case is not tested.
		Diagnostics			
71	TC_045_1	Get Diagnostics	M	М	For interop: check FTP connection
72	TC_045_2	Get Diagnostics - Upload Failed	M	0	
		R	eservatio	n	
		Reservation of a Connector			
108	TC_046	Reservation of a Connector - Transaction		М	
73	TC_046_1	Reservation of a Connector - Local start transaction	С		Only applicable for a Charge Point which supports local start transaction.
	TC_046_2	Reservation of a Connector - Remote start transaction	М		
74	TC_047	Reservation of a Connector - Expire	M	М	
76	TC_048_2	Reservation of a Connector - Occupied	С	0	Only applicable for a Charge Point that does not have a cable lock (AQ-2)
77	TC_048_3	Reservation of a Connector - Unavailable	M	0	
78	TC_048_4	Reservation of a Connector - Rejected	0	М	



		Reservation of a Charge Point			
79	TC_049	Reservation of a Charge Point - Transaction	С	М	Only applicable for a Charge Point which supports reserving an entire Charging Station.
81	TC_050_2	Reservation of a Charge Point - Occupied	С		Only applicable for a Charge Point which supports reserving an entire Charging Station and does not have a cable lock (AQ-2).
82	TC_050_3	Reservation of a Charge Point - Unavailable	С		Only applicable for a Charge Point which supports reserving an entire Charging Station.
		Cancel Reservation			
84	TC_051	Cancel Reservation	M	М	
85	TC_052	Cancel Reservation - Rejected	M	0	
86	TC_053	Use a reserved Connector with parentIdTag	M	0	
		Rei	moteTrig	ger	
87	TC_054	Trigger Message	M	М	
88	TC_055	Trigger Message - Rejected	M	0	
		Sm	artCharg	ing	
		Central Smart Charging			
89	TC_056	Central Smart Charging - TxDefaultProfile	М	M	Not applicable for product subtype Mode 1/2-only Charging Station.
90	TC_057	Central Smart Charging - TxProfile	М	М	Not applicable for product subtype Mode 1/2-only Charging Station.
91	TC_058_1	Central Smart Charging - No ongoing transaction	М		Not applicable for product subtype Mode 1/2-only Charging Station.
92	TC_058_2	Central Smart Charging - Wrong transactionId	М		Not applicable for product subtype Mode 1/2-only Charging Station.
93	TC_082	Central Smart Charging - TxDefaultProfile - with ongoing transaction	М		Not applicable for product subtype Mode 1/2-only Charging Station.
94	TC_066	Get Composite Schedule	М	М	Prerequisite: support for 3 installed profiles with 5 ChargingSchedule periods is required.

Page **36** from **40**



					Not applicable for product subtype Mode 1/2-only Charging Station.
95	TC_067	Clear Charging Profile	M	М	Not applicable for product subtype Mode 1/2-only Charging Station.
96	TC_072	Stacking Charging Profiles	М		Prerequisite: support for 2 stack levels is required. Not applicable for product subtype Mode 1/2-only Charging Station.
		Remote Start Transaction with Charging Profile			
97	TC_059	Remote Start Transaction with Charging Profile	М	М	Not applicable for product subtype Mode 1/2-only Charging Station.
98	TC_060	Remote Start Transaction with Charging Profile - Rejected	М		Not applicable for product subtype Mode 1/2-only Charging Station.



OCPP 1.6 Security

No OCT	T OCPP Compliance Testing Tool scenario	Conf. Test for Charge Point	Conf. test for Central System	Remark
	Secure connection setup			
TC_073	Update Charge Point Password for HTTP Basic Authentication	С	С	Only applicable if the Charge Point supports security profile 1 or 2.
TC_074	Update Charge Point Certificate by request of Central System	С	С	Only applicable if the DUT supports security profile 3.
TC_075_1	Install a certificate on the Charge Point - ManufacturerRootCertificate	С	С	Only applicable if the DUT supports security profile 2 or 3.
TC_075_2	Install a certificate on the Charge Point - CentralSystemRootCertificate	С	С	Only applicable if the DUT supports security profile 2 or 3.
TC_076	Delete a specific certificate from the Charge Point	С	С	Only applicable if the DUT supports security profile 2 or 3.
	Security event/logging			
TC_077	Invalid ChargePointCertificate Security Event	С	С	Only applicable if the DUT supports security profile 3.
TC_078	Invalid CentralSystemCertificate Security Event	С	С	Only applicable if the DUT supports security profile 2 or 3.
TC_079	Get Security Log	M	M	
	Secure firmware update			
TC_080	Secure Firmware Update	M	M	
TC_081	Secure Firmware Update - Invalid Signature	M	M	
	Upgrade security profile			
TC_083	Upgrade security profile	С		Only applicable if the DUT supports multiple security profiles
TC_084	Downgrade security profile - Rejected	С		Only applicable if the DUT supports multiple security profiles



	Setup connection with security profiles			
TC_085	Basic Authentication - Valid username/password combination	С	С	Only applicable if the DUT supports security profile 1.
TC_086	TLS - server-side certificate - Valid certificate	С	С	Only applicable if the DUT supports security profile 2.
TC_087	TLS - Client-side certificate - valid certificate	С	С	Only applicable if the DUT supports security profile 3.



Appendix D: Conformance tests - OCTT Test Rules

The following rules apply:

- For the Mode 1/2-only Charging Station, some devices use a slightly different flow than most stations. Although this flow is not advised, it is allowed during certification:
 - Available ->
 - Short power flow, status: Preparing ->
 - o After power flow: status Available ->
 - o After local authorization: status *Preparing* followed by status *Charging*.

Appendix E: Example EVs to use for testing

The following list contains example EVs that can be used for testing (non exhaustive):

Socket type	Possible EV (non-exhaustive list)
CHAdeMO	Citroën Berlingo Electric Citroën C-Zero Kia Soul EV Mitsubishi Outlander PHEV Nissan Leaf 2 or e-NV200
CCS	BWM i3 Hyundai Ioniq Hyundai KONA Kia e-Niro Opel Ampera-e Tesla Model 3 Volkswagen e-Golf or e-up
Tesla	Tesla model S / X